


MONARVAP REFLEX 200

DEFINITION

Synthetic sheet used as vapor control layer.

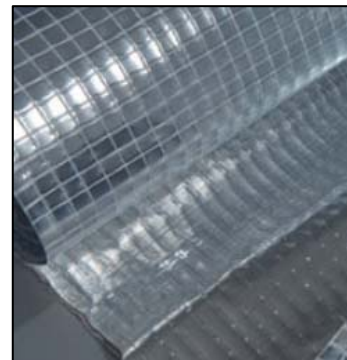

SCOPE OF APPLICATION

Applied upon : discontinuous support – heat insulation support

Applied by : nailing

DESCRIPTION

Surface	Aluminized synthetic film
Reinforcement	Synthetic grid
Under face	Plastic film

DIMENSIONAL CHARACTERISTICS

	Nominal value	Critical value
Length (m)	50	
Width (m)	1.50	1.49
Thickness (mm)	0.18	0.17

PERFORMANCES

	Norm	Unit	Nominal values	Critical values
Tensile strength	EN 12311-2	N/5cm	450 x 400	425 x 400
Nail tearing resistance	EN 12310-1	N	190 x 185	190 x 185
Elongation	EN 12311-2	%	25 x 15	17 x 7
Resistance to impact	EN 12691	mm	200	
Water vapour resistance	EN 1931	M ² .s.Pa/kg	1.68E-09	